

## **FEATURES:**

- · Dual output for smart load management
- · Maximum PV input current 27A
- · Wide PV input voltage range 60VDC~450VDC
- · Built-in Wifi for mobile monitoring (Android/iOS App available)
- Reserved communication port (RS485, CAN-BUS or RS232) for BMS
- · Maximum charging current 120A
- · Battery independent design
- · Battery equalization function to optimize battery performance and extend lifecycle
- · Built-in anti-dust kit
- · Maximum AC Output 3600W

























## OFF-GRID MPPT SOLAR INVERTER | 3600 WATT

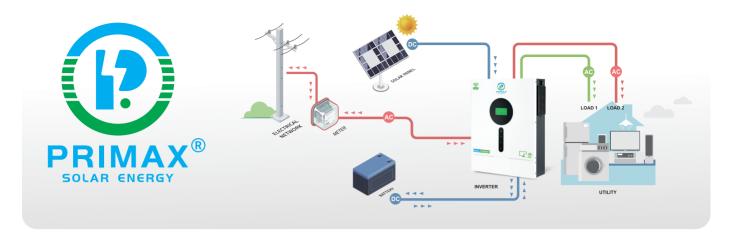

## **Dual Output Operation**

When PV energy and Utility are available and sufficient

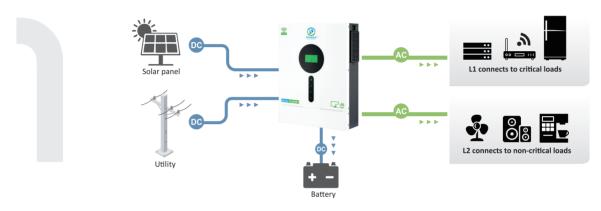


No PV energy is available.



Only battery energy provides power to the loads.



## **OFF-GRID MPPT SOLAR INVERTER | 3600 WATT**

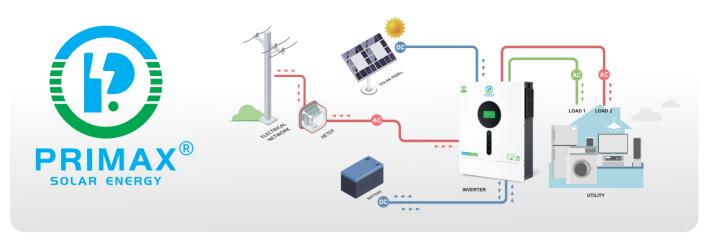

MODEL **GALAXY DUAL PV5000+** 

RATED POWER 3600VA/3600W

**INPUT** 

Voltage 230 VAC

Selectable Voltage Range 170-280 VAC (For Personal Computers); 90-280 VAC (For Home Appliances)

Frequency Range 50 Hz/60 Hz (Auto sensing)

OUTPUT

AC Voltage Regulation (Batt. Mode) 230VAC ± 10% 7200VA Surge Power Efficiency (Peak) 93%

10 ms (For Personal Computers) Transfer Time 20 ms (For Home Appliances) Waveform Pure sine wave

**BATTERY** 

24 VDC Battery Voltage Floating Charge Voltage 27 VDC Overcharge Protection 33 VDC

**SOLAR CHARGER & AC CHARGER** 

MPPT Solar Charger type Maximum PV Array Power 5000W MPP Range @ Operating Voltage 60 ~ 450 VDC Maximum PV Array Open Circuit Voltage 500 VDC Maximum PV Input Current 27A Maximum Solar Charge Current 120A Maximum AC Charge Current 100A Maximum Charge Current 120A

**PHYSICAL** 

107 x 322.6 x 420.3 Dimension, D x W x H (mm) Net Weight (kgs) 9.5 Communication Interface USB/RS232

**OPERATING ENVIRONMENT** 

Humidity 5% to 95% Relative Humidity (Non-condensing)

-10°C to 50°C Operating Temperature Storage Temperature -15°C to 60°C

Product specifications are subject to change without further notice.

