

GALAXY DUAL PV6500+ OFF-GRID MPPT SOLAR INVERTER

FEATURES:

- · Dual output for smart load management
- · Maximum PV input current 27A
- · Wide PV input voltage range 60VDC~450VDC
- · Built-in Wifi for mobile monitoring (Android/iOS App available)
- · Reserved communication port (RS485, CAN-BUS or RS232) for BMS
- · Maximum charging current 120A
- · Battery independent design
- · Battery equalization function to optimize battery performance and extend lifecycle
- · Built-in anti-dust kit
- · Maximum AC Output 5600W
























OFF-GRID MPPT SOLAR INVERTER | 5600 WATT

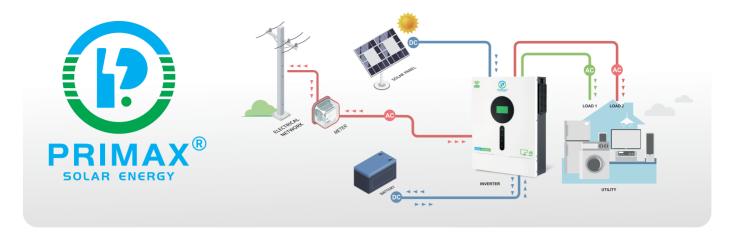

Dual Output Operation

When PV energy and Utility are available and sufficient




No PV energy is available.



Only battery energy provides power to the loads.



OFF-GRID MPPT SOLAR INVERTER | 5600 WATT

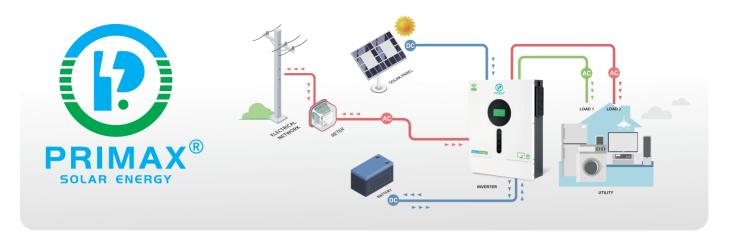

MODEL **GALAXY DUAL PV6500+**

RATED POWER 5600VA/5600W

INPUT

Voltage 230 VAC

170-280 VAC (For Personal Computers); 90-280 VAC (For Home Appliances) Selectable Voltage Range

Frequency Range 50 Hz/60 Hz (Auto sensing)

OUTPUT

AC Voltage Regulation (Batt. Mode) 230VAC ± 10% Surge Power 11200VA Efficiency (Peak) 93%

10 ms (For Personal Computers) Transfer Time 20 ms (For Home Appliances) Waveform Pure sine wave

BATTERY

Battery Voltage 48 VDC 54 VDC Floating Charge Voltage Overcharge Protection 63 VDC

SOLAR CHARGER & AC CHARGER

MPPT Solar Charger type Maximum PV Array Power 6500W MPP Range @ Operating Voltage 60 ~ 450 VDC Maximum PV Array Open Circuit Voltage 500 VDC Maximum PV Input Current 27A Maximum Solar Charge Current 120A Maximum AC Charge Current 100A Maximum Charge Current 120A

PHYSICAL

Dimension, D x W x H (mm) 107 x 322.6 x 420.3 Net Weight (kgs) 10.5 USB/RS232 Communication Interface

OPERATING ENVIRONMENT

Humidity 5% to 95% Relative Humidity (Non-condensing)

-10°C to 50°C Operating Temperature Storage Temperature -15°C to 60°C

Product specifications are subject to change without further notice.



