



SINGLE PHASE HYBRID INVERTER

PSE-DUAL-6KW

NEXA SERIES



110% overload output
(1.3times \leq 60s)



Support dry contact
starting generator



Normal operation of
only-connection PV panels



UPS switch
over time $<$ 10ms



Up to 2 times input



Dual back up output

Max
18

The maximum current of
a single string module is 10A



Supports a maximum of
16 single-phase units



Support 110% three-phase
unbalanced output

NEXA Series



Support APP Online Operation & Maintenance



Battery Side High Frequency Transformer Isolation, Safe And Reliable



Support Battery Charging/Discharging According To The Time Setting



PV Input Reverse Polarity Protection




Output Over Current/Voltage Protection



The Battery Charge and Discharge Current Up to 120A

Solution Diagram

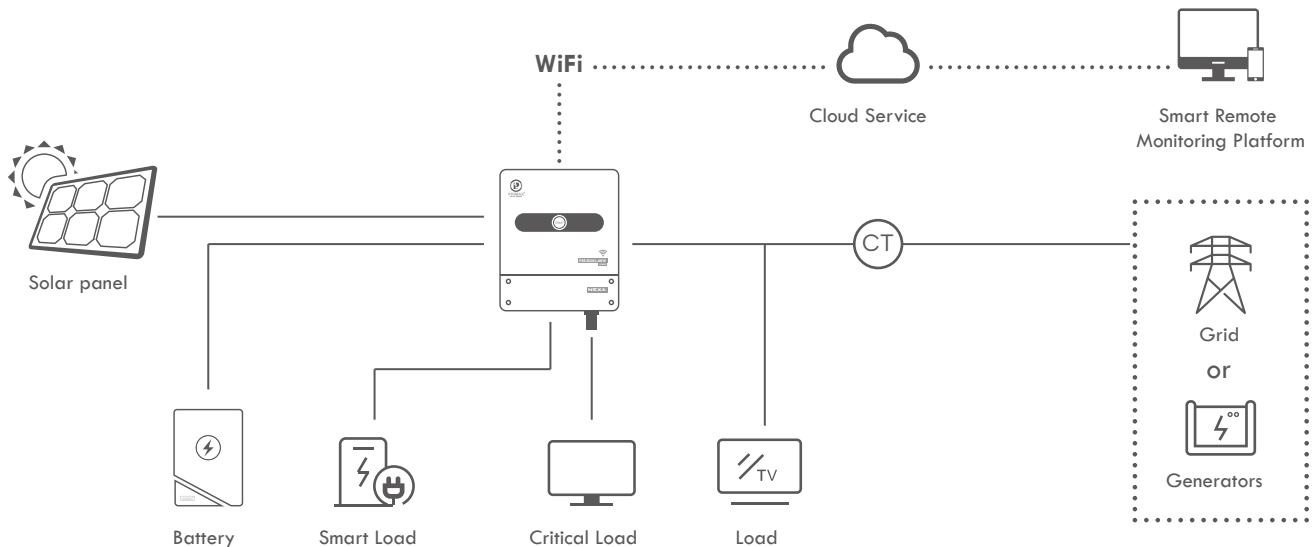

Model

PSE-DUAL-6KW

PV INPUT

Max. DC input power	[W]	9000
Max. DC input voltage	[V]	500
MPPT voltage range	[V]	150-450
Starting voltage	[V]	125
Max. input current	[A]	18/18
Max. short circuit current	[A]	22.5/22.5
Number of MPP trackers		2
Strings per MPP tracker		1

AC OUTPUT (GRID)

Rated output power	[W]	6000
Max. output apparent power	[VA]	6600
Rated output voltage	[V]	220/230/240
Rated output frequency	[Hz]	50/60
Max. output current	[A]	27
THDi		< 3%
Output power factor		~1 (-0.8 leading~+0.8 lagging)

AC OUTPUT (TWO BACKUP)

Full Max. output power	[W]	6000
Rated output voltage	[V]	220/230
Rated output frequency	[Hz]	50/60(±0.2%)
Back up1 Max. output power	[W]	6000
Back up2 Max. output power	[W]	6000
Output Power Factor(off grid)		1~(0.8 leading to 0.8 lagging)
Output Current Harmonic Distortion		THD<3%(Nonlinear load); THD<1.5%(Linear load)
Max. output current	[A]	27

BATTERY PARAMETERS

Battery Type		Lithium or lead acid battery
Rated battery voltage	[V]	48
Voltage range	[V]	44-57
Max. charge/discharge current	[A]	120
BMS communication		CAN/RS485

EFFICIENCY

Max. efficiency(PV)		97.6%
Max. efficiency(cell)		94.5%
European efficiency		97%

PROTECTION

PV input reverse polarity protection		Yes
PV insulation resistance detection		Yes
Residual current detection		Yes
Output over current protection		Yes
Output short circuit protection		Yes
Output over voltage protection		Yes

OTHERS

Operating temperature range	[°C]	-25~60
Storage temperature range	[°C]	-30~65
Humidity range		0~95%
Operating altitude	[m]	≤4000
Communication		RS485/CAN/WiFi/Ethernet/4G
Noise (db)		<25
Size (W×H×D)	[mm]	427*554*198
Weight	[kg]	19

STANDARD

EN 62109-1/2, IEC 62109-1/2, EMC 61000, EN50549, VDE 4105/0124, NRS 097-2-1, IEC61727/62116/61683