

SOLAR CAPACITY **11000W**




GALAXY DUAL PV11000+ MAX OFF-GRID MPPT SOLAR INVERTER

FEATURES :

- Dual outputs for smart load management
- Two independent AC power sources connected and switched automatically
- Built-in current transformer sensor to meet self-consumption application
- Support external BTS (Battery Temperature Sensor) detection
- Built-in power status lighting indicators
- Built-in 2.8" colored LCD with slide operation
- Supports USB On-the-Go function
- Reserved communication port for BMS (RS485, CAN-BUS or RS232)
- Support optional GFCI, Rapid shutdown, AFCI detections
- Parallel operation with 6 units




OFF-GRID MPPT SOLAR INVERTER | 8000 WATT

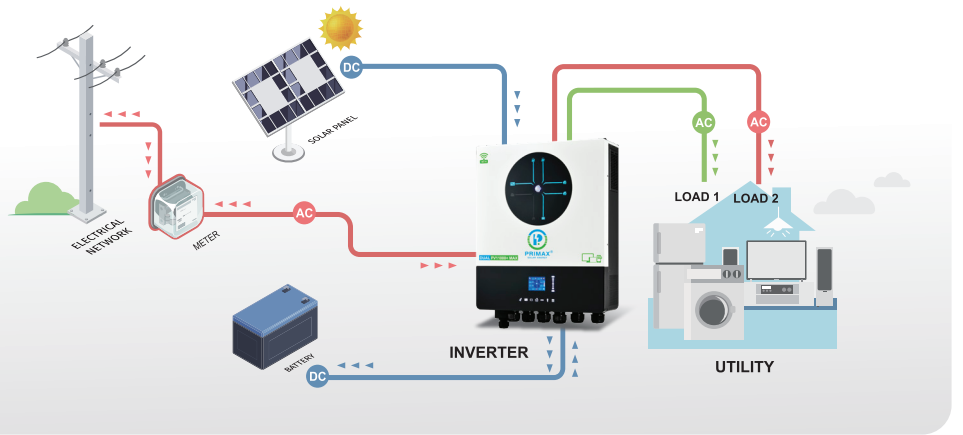

Dual Output Operation


When PV energy and Utility are available and sufficient

1

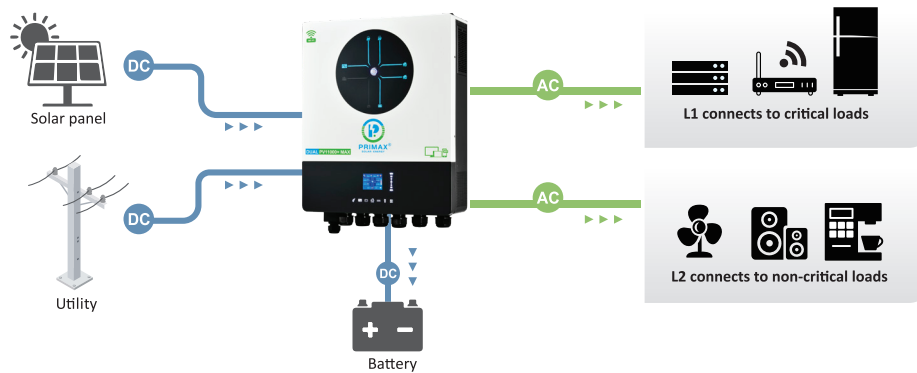


No PV energy is available.

2

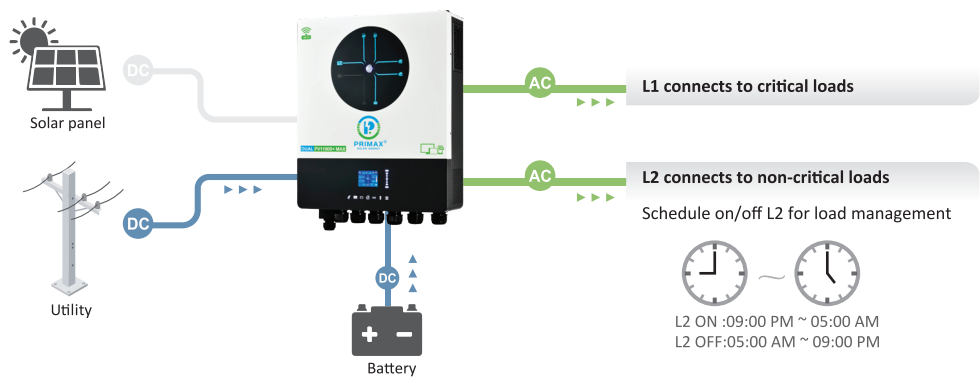


Only battery energy provides power to the loads.

3

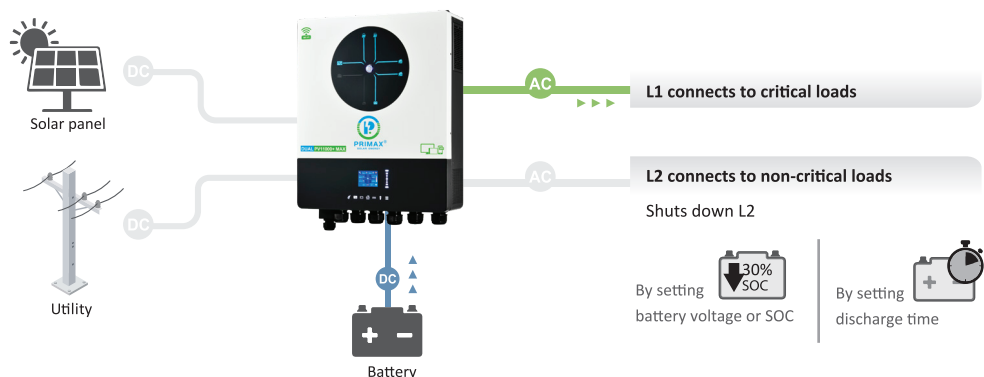

OFF-GRID MPPT SOLAR INVERTER | 8000 WATT

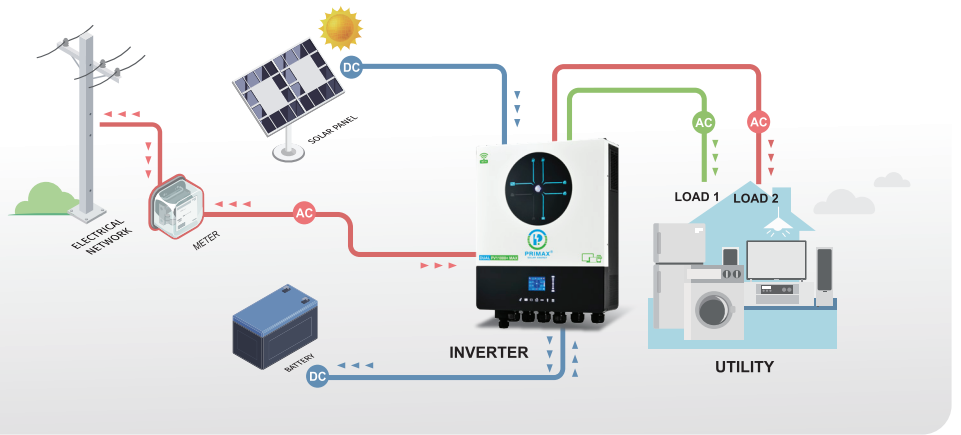

MODEL	GALAXY DUAL PV11000+ MAX
RATED POWER	8000VA/8000W
PARALLEL CAPABILITY	YES, 6 units
INPUT	
Voltage	230 VAC
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)
OUTPUT	
AC Voltage Regulation (Batt. Mode)	230VAC \pm 5%
Surge Power	16000VA
Efficiency (Peak)	93%
Transfer Time	10 ms (For Personal Computers) ; 20 ms (For Home Appliances)
Waveform	Pure sine wave
BATTERY	
Battery Voltage	48 VDC
Floating Charge Voltage	54 VDC
Overcharge Protection	63 VDC
SOLAR CHARGER & AC CHARGER	
Solar Charger Type	MPPT
Maximum PV Array Power	11000W (5500W x 2)
MPPT Range @ Operating Voltage	90 ~ 450 VDC
Maximum PV Array Open Circuit Voltage	500 VDC
Maximum PV Input Current	27A x 2 (MAX 40A)
Maximum Solar Charge Current	150A
Maximum AC Charge Current	120A
Maximum Charge Current	150A
PHYSICAL	
Dimension, D x W x H (mm)	145 x 438 x 553.6
Net Weight (kgs)	18.4
Communication Interface	USB/RS232/RS485/WiFi/Dry-contact/BTS Support optional GFCI, Rapid shutdown, AFCI detection
External Current Sensor Port	Yes, built-in current transformer sensor
OPERATING ENVIRONMENT	
Humidity	5% to 95% Relative Humidity(Non-condensing)
Operating Temperature	-10°C to 50°C
Storage Temperature	-15°C to 60°C
STANDARD	
Compliance Safety	CE

Product specifications are subject to change without further notice.